
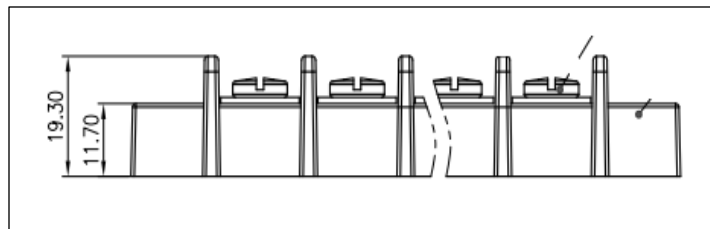


SCOPE: This specification applies to – DG99-A-XXP-13-00A(H) – Terminal Block

SPECIFICATIONS:

Rated: 75 Amps, 600 Volts
 17.45mm (.687") centers – 11/16"
 Closed Bottom Design
 Number of Poles: 2 - 12
 Wire Range: 4~14 AWG
 Operation Temperature: -40°C ~ +125°C
 Insulation Withstands: AC2000V / 1 min.
 Insulation Resistance: 500MΩ at DC500V

Housing Material: Polycarbonate (PC), Black
 Screw: M5.0 Zinc Plated Steel
 Screws Torque: 17.5 In-Lb.
 Terminals: Tin Plated Copper Alloy

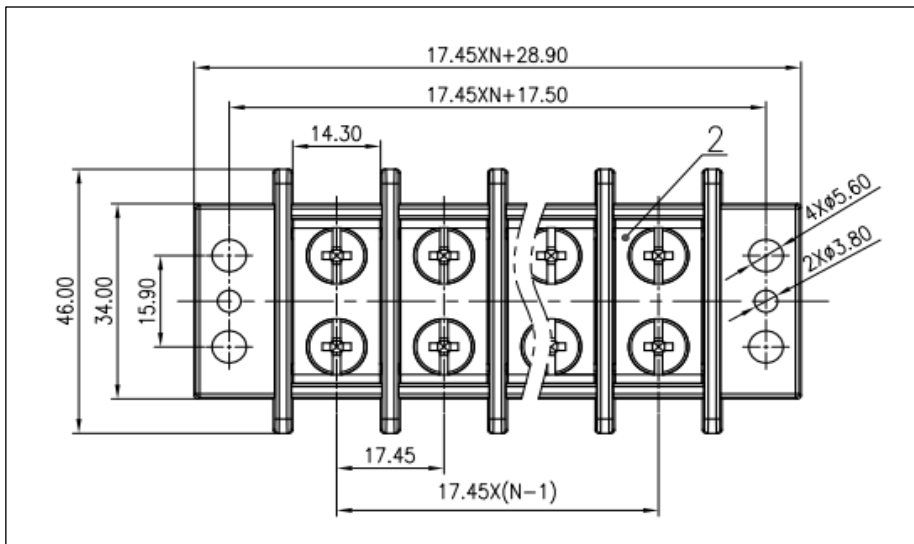

<p>BlockMaster Confidential and Proprietary</p>	<p>BlockMaster Electronics 1400 Howard Street Elk Grove Village, IL. 60007 Toll Free: 800-595-8881 FAX: 847-956-1690 www.blockmaster.com</p>
<p>All dimensions are in MM unless otherwise specified</p>	
<p>Drawing Number: DG99-A-XXP-13-00A(H)</p>	<p>Terminal Block</p>
<p>Date: 6/11/2017</p>	<p>THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF BLOCKMASTER ELECTRONICS INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT BLOCKMASTER ELECTRONICS INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR.</p>